

LGP300/350/85 Grout Station/Plant

Description

The LGP300/350/85 grout station is combination of mixer, agitator and hydraulic plunger grout pump in one plant. Mainly suitable for mixing and pumping water, cement, sand, bentonite, filler, clay power, silicates and other additives.

Feature

1. Compact size, It is combination of mixer, agitator and hydraulic plunger grout pump in one base frame;
2. Have low pressure and high pressure, stepless speed regulation;
3. Yuken relief valve and directional valve for hydraulic system of grout pump;
4. Butterfly valve of mixer and agitator;
5. Oil temperature gauge can automatically control cooler fan working in normal temperature range, if temperature is too high, the machine will stop work automatically;
6. Operation and maintenance are simple;
7. With ISO, CE certificate.



Technical data

Type	LGP300/350/85 Grout Station
Voltage	3 phase, 380V, 50HZ
Dimensions	2100x2030x1700mm
Weight	1250kg
Mixer	
Capacity	300L
Power	9kw
Rated Rev.	1500rpm
Agitator	
Volume	350L
Power	1.5kw
Rated Rev.	36rpm
Pump	
Type	Hydraulic Plunger pump
Pressure and Output	24 Bar (low pressure) 85L/min
	50 Bar (high pressure) 55L/min

Pictures in different angles:








Detailed parts



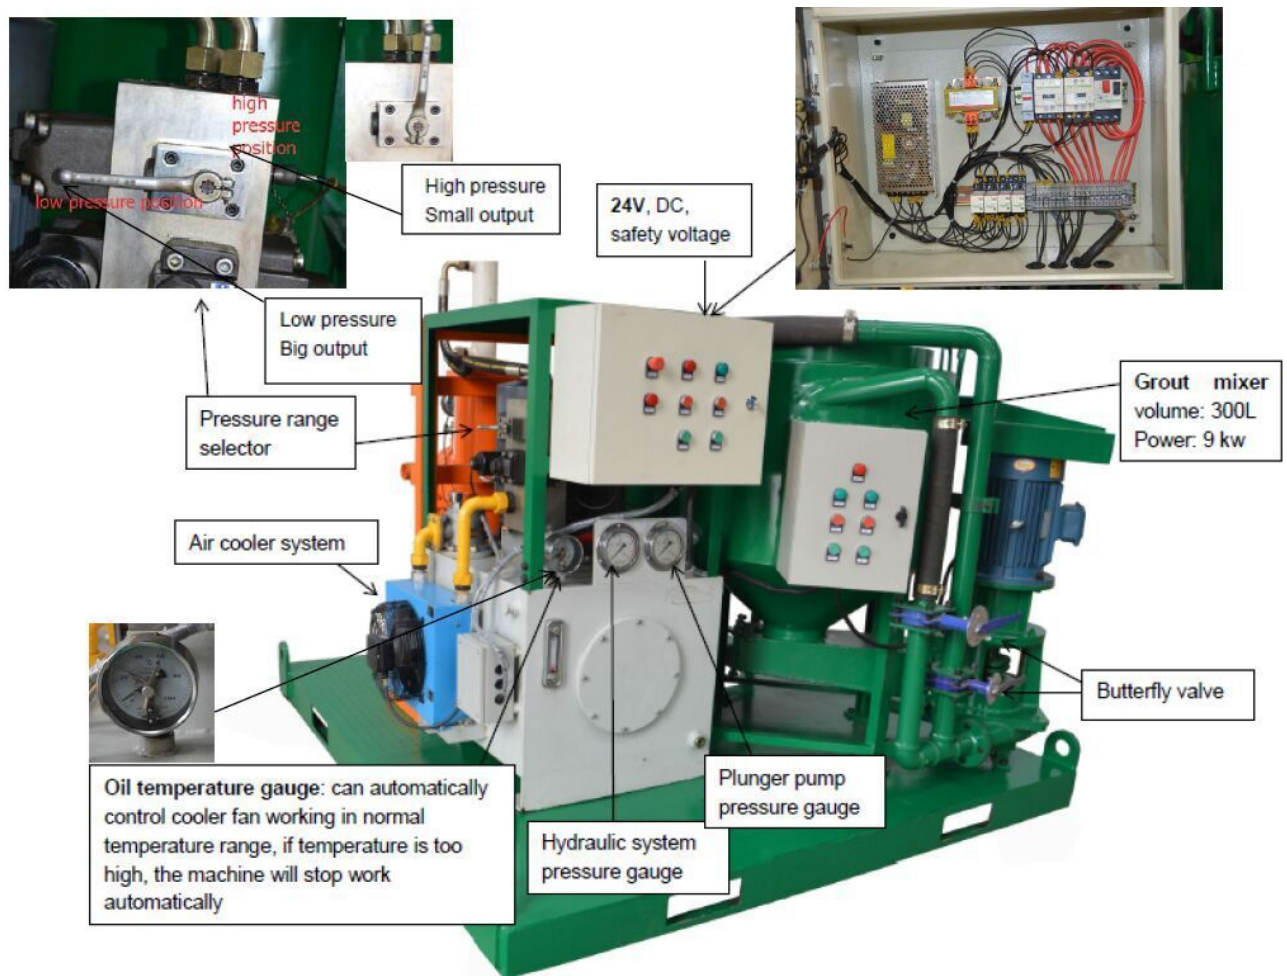

郑州佰利得机器制造有限公司

Lead Equipment Co.,Ltd.

Phone: +86-371-63902781

Mobile phone:+86-18638162745

Email: sales@leadcrete.com

Web: www.leadcrete.com