


XPB Series High Pressure Plunger Grout Pump

XPB Series Grouting Pump

XPB-10 Low Pressure Large Output Grouting Pump

This model is applied in the working field of filling slurry and the second grouting with low pressure and large output.

1. Three plunger
2. Ball valve
3. Simple maintenance and Long life.

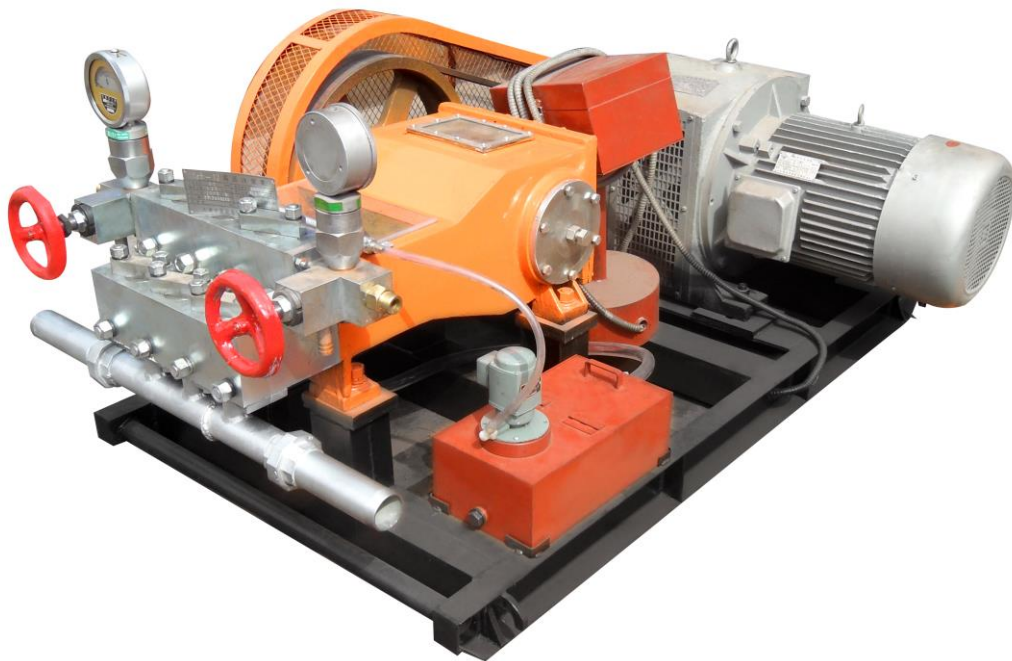

Specification:

Max.motor speed		1300r/min		Plunger stroke		85mm
Theoretical output		Motor power				Plunger diameter
		11kw	15kw	18.5kw	22kw	
M ³ /h	L/min	Rated output pressure(kgf/cm ²)				
9.6	160	25	35	45	52	50mm
7.8	130	32	45	55	65	45mm
6	100	46	55	70	85	40mm
5.4	90	50	65	80	95	38mm
4.8	80	58	80	95	//	35mm
3.3	55	80	//	//	//	30mm



LEAD EQUIPMENT CO., LTD.

Xisihuan Ring-Road East, Tielu, Xushui Town, Zhongyuan District,
Zhengzhou City, China.


Website:www.leadcrete.com E-Mail: sales@leadcrete.com

TEL.:+86-371-63902781 FAX: +86-371-63902781

XPB-10 Double Hydraulic Low Pressure Grout Pump

Three (double) pump is my company to meet the demand of special grouting, in high-pressure grouting pump on the basis of the development of new products, each working cylinder adopts separate into liquid drainage way alone, meet the requirements of customers a variety of liquid grouting, each drainage pipe line the front of the equipped with one-way valve, prevent different mixed liquid in the pump, effectively avoid caused by solidification fast pump can't work normally, the check valve installed in the position closest to the face, is conducive to the safe use. Three (double) pump principles of work and high pressure is the way into liquid and liquid discharge, different medium seal changes and changes caused by need to the corrosion resistant material.

In our company a variety of pump type slurry pump can be restructured into three pump, product sample as shown in the parameter is one of the models, for example, welcome users to place an order according to the parameters of the demand.

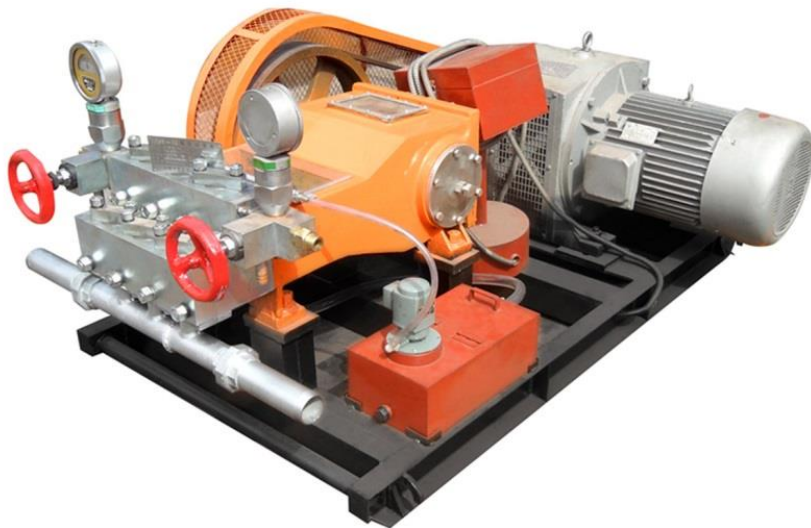

Specification:

Max.motor speed		1300r/min		Plunger stroke		85mm
Theoretical output		Motor power				Plunger diameter
		11kw	15kw	18.5kw	22kw	
M ³ /h	L/min	Rated output pressure(kgf/cm ²)				
9.6	160	25	35	45	52	50mm
7.8	130	32	45	55	65	45mm
6	100	46	55	70	85	40mm
5.4	90	50	65	80	95	38mm
4.8	80	58	80	95	//	35mm
3.3	55	80	//	//	//	30mm



LEAD EQUIPMENT CO., LTD.



Xisihuan Ring-Road East, Tielu, Xushui Town, Zhongyuan District,
Zhengzhou City, China.

Website: www.leadcrete.com E-Mail: sales@leadcrete.com

TEL.: +86-371-63902781 FAX: +86-371-63902781

XPB-50 High Pressure Grouting Pump

The fluid end of pump adopts the assembly body and the transmission of the power end is the ball bearing with low noise and low temperature, which can keep working continuously for 24 hours. It is applied for various grouting and oil well grouting.

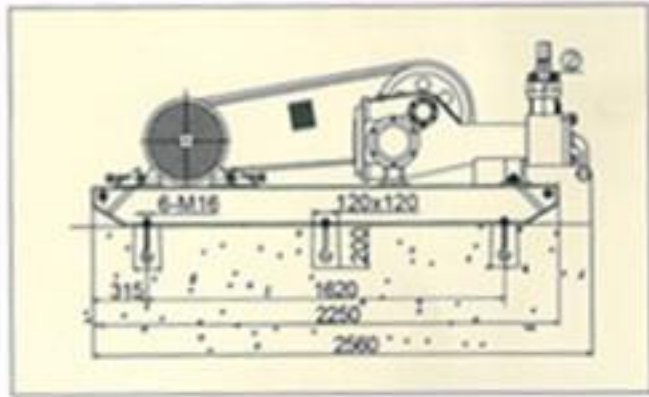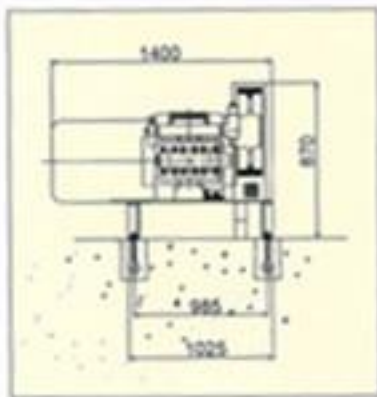

Specification:

Max.motor speed	1300r/min	Plunger No.	3pc
Plunger stroke	110mm		
Motor power:55kw			
Plunger diameter	55mm	45mm	40mm
Rated working pressure	20Mpa	30Mpa	38Mpa
Theoretical output	140L/min	94L/min	74L/min



LEAD EQUIPMENT CO., LTD.

Xisihuan Ring-Road East, Tielu, Xushui Town, Zhongyuan District,
Zhengzhou City, China.


Website:www.leadcrete.com E-Mail: sales@leadcrete.com

TEL.:+86-371-63902781 FAX: +86-371-63902781

XPB-90 Series High Pressure Grouting Pump

The fluid end of pump adopt the assembly body and the transmission of the power end is the ball bearing with low noise and low temperature, which can keep working continuously for 24 hours. It is applied for high pressure rotation grouting for ground work treatment, curtain grouting, blocking leakage at the mine, anchor at the slope and so on.

XPB-90D

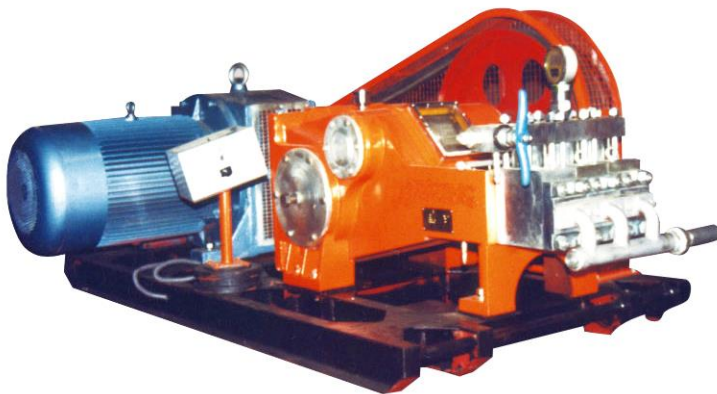

XPB-90E



Specification:

XPB-90D					
Max.motor speed		1340r/min	Plunger stroke		120mm
Theoretical output		Motor power			Plunger diameter
		55kw	75kw	90kw	
M³/h	L/min	Rated output pressure(Mpa)			
7.5	125	22	32	38	50mm
6	100	28	39	45	45mm
4.8	80	33	45	55	40mm

LEAD EQUIPMENT CO., LTD.



Xisihuan Ring-Road East, Tielu, Xushui Town, Zhongyuan District,
Zhengzhou City, China.

Website: www.leadcrete.com E-Mail: sales@leadcrete.com

TEL.: +86-371-63902781 FAX: +86-371-63902781

XPB-90E							
Max.motor speed		1320r/min	Plunger stroke				80mm
Theoretical output		Motor power					Plunger diameter
		55kw	75kw	90kw	110kw	132kw	
M³/h	L/min	Rated output pressure(Mpa)					
13	217	12	17	20	25	30	80mm
11	188	14	19	23	28	34	75mm
9.9	165	16	22	26	32	39	70mm
8.6	141	18	25	31	38	45	65mm
7.1	119	22	30	37	45	50	60mm
6	100	26	37	44	53	56	55mm
5	83	32	44	53	60	60	50mm

Construction site:

