

LH15-200 Dosing Hose Pump

LH15-200 series dosing hose pump consists mainly of pump house, pressure shoes, driving plate, motors, variable speed gear box, reinforced hose etc. The squeeze hose is U-shaped in the pump house, by pressure shoe squeeze hose formed pressure to achieve slurry transport; simple structure, easy to maintain, dry-run without damage, no noise. Flow rate can be adjusted by speed control handle, flow stability accuracy can up to $\pm 1\%$, specially suitable for viscous slurry dosing and pumping etc.




Product Specification

Description	Item	
Dosing Pump	LH15-200B	LH15-200B (EX)
Speed	60rpm	60rpm
Output	300L/h	300L/h
Pressure	15bar	15bar
Squeeze Hose ID	15mm	15mm
Power	0.75Kw	0.75Kw (explosion proof motor)
Overall Dimension	800x750x800mm	800x750x850mm
Weight	101kg	162kg

Product Feature


- ★ Hose leak detection, quickly detect hose failure;
- ★ Electric contact pressure gauge, ensure that hose pump could stop working automatically once the pressure is too high;
- ★ Speed control handle, adjusted stepless;
- ★ Pressure shoe structure, like Bredel hose pump;
- ★ Explosion proof motor and electric control box for option.

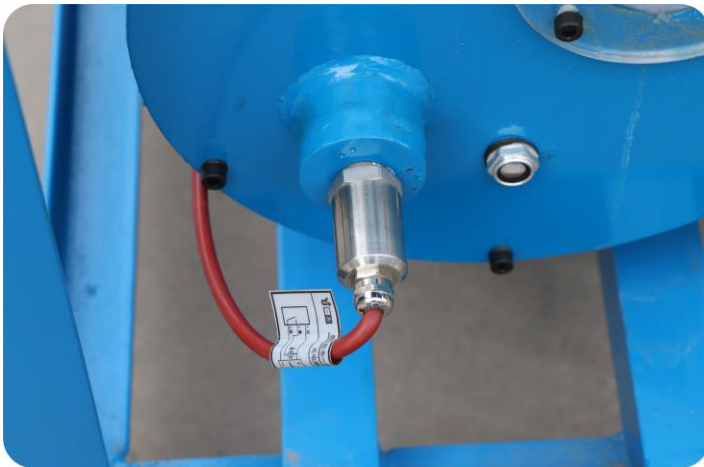

Hose leak detection device



Electric contact pressure gauge

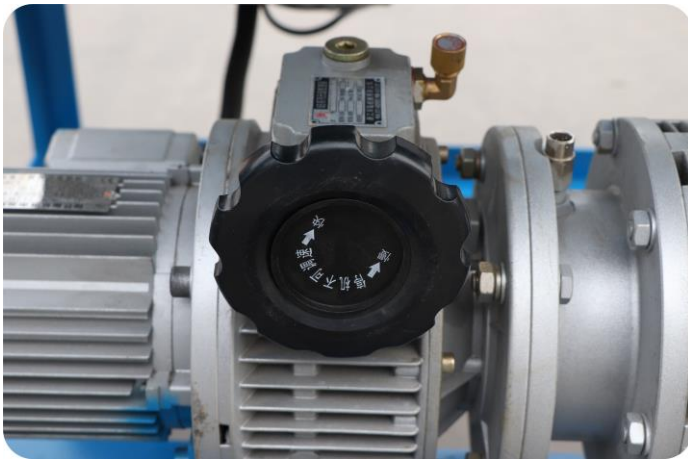

Speed control handle



Pressure shoe structure



郑州佰利得机器制造有限公司

Zhengzhou Lead Equipment Co., Ltd.

地址 ADD: 郑州市中原区西流湖街道办事处铁炉村西四环东
Xisihuan Ring-Road East, Tielu, Xiliu lake sub-district,
Zhongyuan District, Zhengzhou, Henan

邮编 P.C.:450042

网址 (Web): <http://www.leadcrete.com> E-Mail: sales@leadcrete.com

电话 TEL.:+86-371-63902781 传真 FAX:+86-371-63526676



Explosion proof motor for option



Explosion proof electric control box for option

