

LZ-3ER-GV Refractory spraying machine



◆ Product Description

LZ-3ER-GV Refractory spraying machine is a multifunctional rotor type machine for dry spraying and conveying. The materials that can be sprayed and conveyed are refractory materials, castable, concrete, mortar, sand, pea gravel and crushed stone.

Compared with traditional gunning machine, LZ-3ER-GV has the advantages of being lighter and more compact. By changing the rotor of different sizes and adjusting the motor speed, the theoretical displacement range is 0.5~3m³/h, which can better meet the needs of customers.


◆ Product Feature

1. Electrical drive with a frequency inverter.
2. Air vibrator at the filling hopper and air gun to clean the machine.
3. Less dust development.
4. Reduced rebound.
5. For refractory furnace liner repair, concrete repair, slope stabilization, excavation support or in mining.
6. Light and compact machine design.

◆ Product Specification


Name		Data			
Machine Type		Rotary machine LZ-3ER-GV			
Process		Thin-stream			
Motor power		4 KW			
Power supply		3X380-480V, 50/60Hz			
Rotor size in liters		0.57	1.3	2.4	3.4
Output in m3/h ①		0.25-0.5	0.5-1.1	1.0-2.1	2.1-3
Recommended hose sizes		DN25	DN25	DN32	DN40
Grain sizes in mm		8	8	12	15
Working air pressure in Mpa		0.2~0.4			
Air consumption in m3/min		3.5	5~6		
Max. conveying distance in m		Dry: 200 (Horizontal) /50 (vertical)			
Dimensions in mm	Length	1471			
	Width	780			
	Height	1200	1212	1272	1330
Weight in kg		550	550	560	570
① Based on a theoretical filling level of 100%. Prior to use or processing, always consult the current product data sheet of the products used					
We could also customize according to your demands.					

◆ Dimension

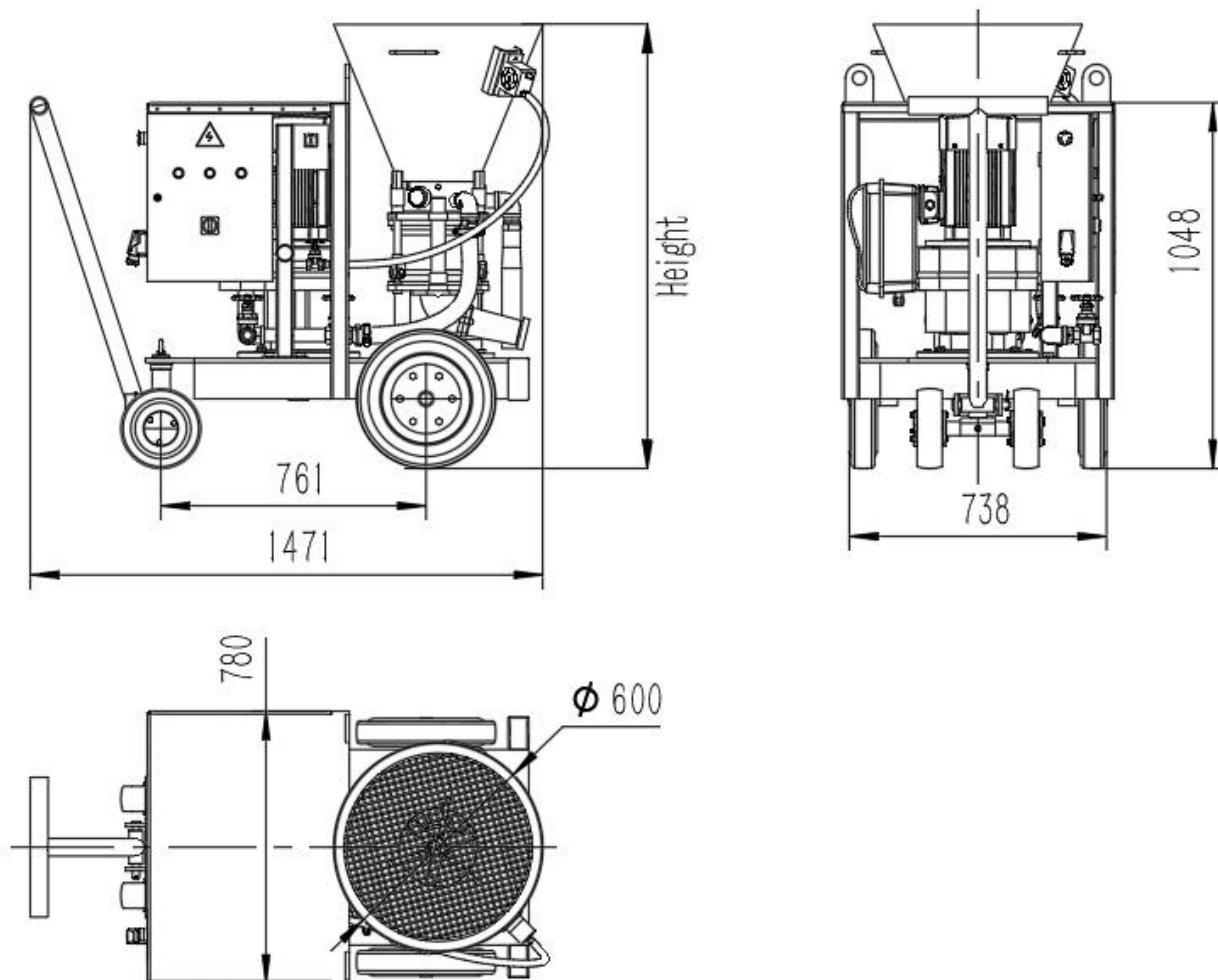

◆ Detail Part



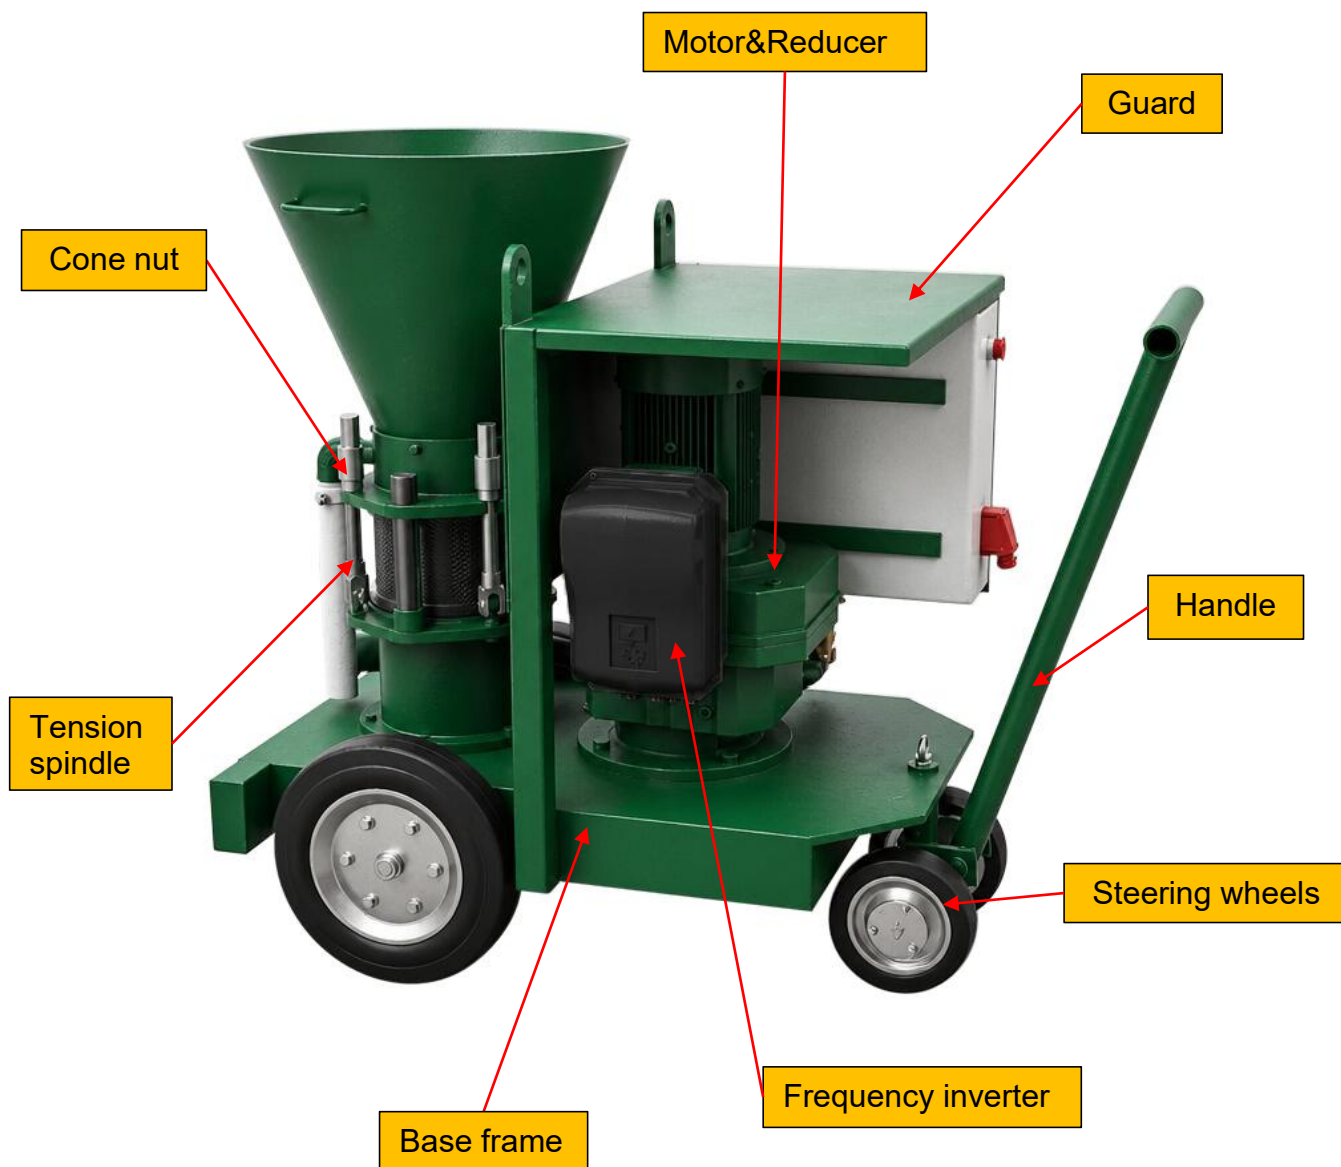

Zhengzhou Lead Equipment Co., Ltd.

Add: Xisihuan Ring-Road East, Tielu, Xiliu lake sub-district, Zhongyuan District,
Zhengzhou, Henan
P.C.: 450042
Web: www.leadcrete.com; www.leadcrete.net
Email: sales@leadcrete.com
Phone/Whatsapp/Wechat: +86-18538591025